

Congratulations!

You just purchased one of the most advanced Optimist masts available world-wide.

This rig pack contains:

- 1.- 2x nylon top pins
- 2.- 1x low friction windindicator
- 3.- 1x halyard with ball bearing blocks
- 4.- 1x 4mm Vectran halyard line
- 5.- 1x halyard handle
- 6.- 1x mastsleeve EX1211

*Fig.1 shows what the rig pack contains

THE FASTENING OF THE SAIL

The fastening of a sail to a **BLACKGOLD** mast needs only to be done once:

Adjust the upper (double loops) from the 2.2mm tack line (not included).

Adjust the lower (single loop) from the 2.2mm tack line (not included), in such a way that the sail measurement band does not surpass the top measurement band on the mast.

TOP PIN

DOUBLE LOOP

SINGLE LOOP



Fig. 1




OPTIPARTS
MARINE EQUIPMENT

MOUNTING THE HALYARD BLOCKS

Fasten the sprit halyard by simply hooking the halyard block into the mast.

Make sure you put the sprit is on the starboard side of the mast, not the port.

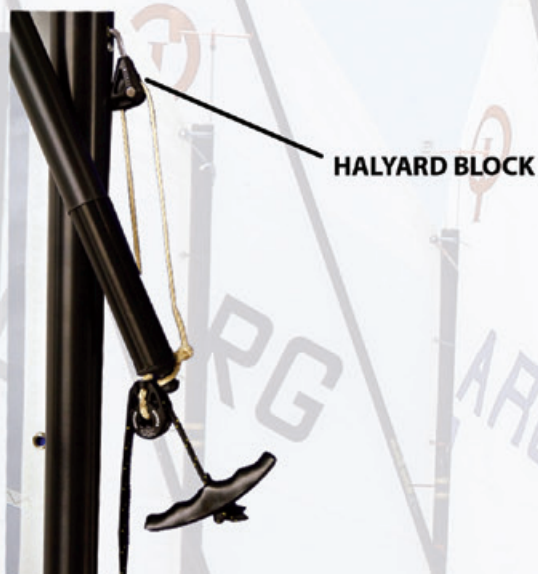

NOTICE:

If your boat has a larger Optimax deck collar for masts with a sleeve you can mount a sleeve on the mast, If your boat does not have a deck collar for masts with a sleeve you can use the mast without the sleeve or mount a new Optimax deck collar in your boat. We recommend using the Optimax deck collar to prevent wear and minimise friction between mast en deck collar.

MOUNTING THE SLEEVE

You will notice the sleeve is slightly smaller than the mast. To mount the sleeve you should gently warm the sleeve with a hairdryer or paint stripper. You can then easily slide the warm sleeve over the mast into position.



215 MM

www.optiparts.com



OPTIPARTS
MARINE EQUIPMENT